

TÜB 60

Suspended Linear Luminaire



DESCRIPTION

Tüb 60 excentuates interior architectural designs through it's curved linear form and sleek design. Luminaire is suspended from aircraft cable with a ceiling mounted canopy which can be painted independent to the luminaire for a uniquely custom design. Three lengths are available ranging from 2' 9" to 5' 6" alongside color temperatures of 2700K, 3000K, 3500K, and 4000K. Optical options include a traditional Opal Diffused Lens, Opal Comfort Diffused Lens, and Specialized Tech optics. Tüb 60 Tech includes a matte black reflector with a custom LED board which produce unparallelled uniform illumination that is comfortable even at eye level, making it suitable for contemporary restaurants, offices, and other hospitality venues. End Caps are available blank or with an embossed Lamp logo in 11 finish options for ultimate configurability.



Date: _____ Type: _____ Catalog Number: _____

Project Name: _____

ORDERING INFORMATION

LUMINAIRE											
MODEL	CANOPY	LUMINAIRE LENGTH	OUTPUT	CRI	CCT	CONTROL	VOLTAGE	OPTIC	FINISH	CANOPY FINISH	OPTION
TUB60-D Lamp Tüb 60 Direct	SF Surface Mounted Canopy & Driver Enclosure	2.8 2' 9"	SO Standard Output	90 90 CRI	27K 2700K	ON-OFF On/Off	UNV 120-277v	OP Opal Diffused Lens	BL Black	BL Black	NEC No End Caps (Select When Ordering End Caps Separately; See Page 4 for Details)
TUB60-DI Lamp Tüb 60 Direct/Indirect		3.7 3' 8"	HO High Output		30K 3000K	DIM 0-10v Dimming		OPC Opal Comfort Diffused Lens	WH White	WH White	
		5.5 5' 6½"			35K 3500K				SB Signal Blue	SB Signal Blue	
					40K 4000K				OW Oyster White	OW Oyster White	
					TW Tunable White (2700K to 6500K)				GG Graphite Grey	GG Graphite Grey	
									TB Turquoise Blue	TB Turquoise Blue	
									SG Silver Grey	SG Silver Grey	
									SKB Sky Blue	SKB Sky Blue	
									GBRN Grey Brown	GBRN Grey Brown	
									VM Vermillion	VM Vermillion	
									DO Deep Orange	DO Deep Orange	

See Page 4 for ordering information of available accessories.

Custom solutions are available; consult factory for assistance via phone at (864) 487-3535 ext. 258 or via email at DesignServices@EXP-Brands.com.




www.LampNorthAmerica.com

For other Experience® Brands companies, please visit www.ExperienceBrandsUSA.com.

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear online are the most recent ones available. Consult the factory to verify current status of BAA/TAA/BABAA compliance.

TÜB 60

Suspended Linear Luminaire

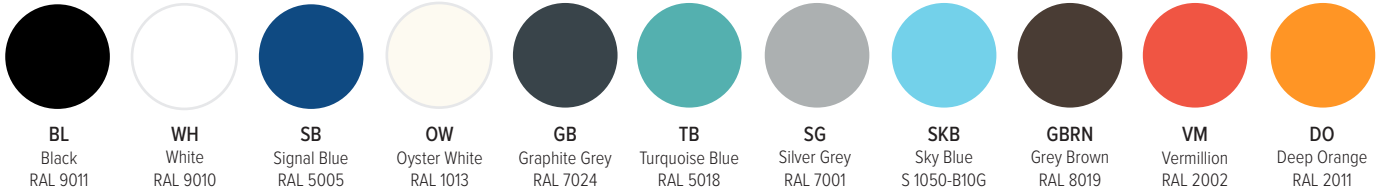

LAMP TÜB 60		
PHYSICAL	HOUSING	Recycled Aluminum Extrusion
	LENS	Opal
		Opal Comfort
		Translucent Polycarbonate Diffuser
		Translucent Polycarbonate Diffuser with Optical Sheet for Increased Comfort
	DRIVER LOCATION	Driver is Mounted to Ceiling in 11" (Static White) or 19" (Tunable White) Enclosure with Square J-Box Plate
	END CAP FINISH	White End Caps on White Luminaires, All Others Black; Standard End Caps Blank, Embossed LAMP Logo Available. See Page 4 for Ordering Information of Custom End Caps.
	MOUNTING	Mounted via 8' Adjustable Aircraft Suspension Cables (Included)
	DIMENSIONS	ø2.48" x 33" / 44" / 66½" L
WEIGHT	Between 4.65 to 8.84 Pounds	
OPERATING TEMPERATURE	-40°F to 104°F (-40°C to 40°C)	

ELECTRICAL	VOLTAGE	120-277 Volts
	CONTROL	On/Off, 0-10v Dimming
	CABLE FINISH	White Cable for White Luminaires; All Others are Black

PHOTOMETRIC	LUMEN MAINTENANCE	L80 > 72,000 Hours at 77°F*	
	UGR	Opal	Opal Comfort
		UGR < 19	15
CRI	> 90 CRI		

LIGHT DISTRIBUTIONS	OUTPUT	OPTIC	CCT	DIRECT								
				2.8'			3.7'			5.5'		
				LUMENS	WATTAGE	EFFICACY	LUMENS	WATTAGE	EFFICACY	LUMENS	WATTAGE	EFFICACY
STANDARD OUTPUT	OPAL		2700K	717	10	72	955	12	80	1433	17	84
			3000K	754	10	75	1005	12	84	1508	17	89
			4000K	778	10	78	1038	12	87	1557	17	92
	OPAL COMFORT		2700K	663	10	66	884	12	74	1327	17	78
			3000K	698	10	70	931	12	78	1396	17	82
			4000K	720	10	72	961	12	80	1441	17	85
HIGH OUTPUT	OPAL		2700K	1468	17.8	82	1957	25.4	77	2936	34.7	85
			3000K	1545	17.8	87	2060	25.4	81	3089	34.7	89
			4000K	1594	17.8	90	2126	25.4	84	3189	34.7	92
	OPAL COMFORT		2700K	1359	17.8	76	1912	25.4	75	2717	34.7	78
			3000K	1430	17.8	80	1906	25.4	75	2860	34.7	82
			4000K	1476	17.8	83	1968	25.4	77	2951	34.7	85

Values based on full output.

* LED life may vary under actual field conditions due to external factors. Lifetime estimates are generated from actual testing in a controlled environment. Values are conservatively derived from those numbers.



www.LampNorthAmerica.com

For other Experience® Brands companies, please visit www.ExperienceBrandsUSA.com.

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear online are the most recent ones available. Consult the factory to verify current status of BAA/TAA/BABAA compliance.


LIGHT DISTRIBUTIONS	OUTPUT	OPTIC	CCT	DIRECT-INDIRECT											
				2.8'				3.7'				5.5'			
				WATTAGE	EFFICACY	LUMENS UP	LUMENS DOWN	WATTAGE	EFFICACY	LUMENS UP	LUMENS DOWN	WATTAGE	EFFICACY	LUMENS UP	LUMENS DOWN
STANDARD OUTPUT	OPAL	2700K	20	66	600	717	22	82	840	955	34	81	1320	1433	
		3000K	20	69	632	754	23	82	884	1005	34	85	1389	1508	
		4000K	20	72	652	778	23	85	912	1038	34	88	1433	1557	
	OPAL COMFORT	2700K	20	63	599	663	23	75	840	884	34	78	1319	1327	
		3000K	20	66	630	698	22	82	883	931	34	82	1388	1396	
		4000K	20	69	651	720	22	85	911	961	34	85	1433	1441	
HIGH OUTPUT	OPAL	2700K	27	77	600	1468	36	78	841	1957	51	83	1321	2936	
		3000K	27	81	632	1545	36	82	884	2060	51	88	1390	3089	
		4000K	27	83	652	1594	36	84	913	2126	51	91	1434	3189	
	OPAL COMFORT	2700K	27	73	600	1359	36	74	839	1812	51	79	1320	2717	
		3000K	27	76	631	1430	36	78	884	1906	51	83	1388	2860	
		4000K	27	79	651	1476	36	80	912	1968	51	86	1433	2951	

Values based on full output.

CERTIFICATIONS	SAFETY	CSA Certified
	INGRESS PROTECTION	IP20
	IMPACT RATING	IK07
	WARRANTY	Five Year Limited Warranty

DIMENSIONS

All dimensions are shown in inches unless otherwise noted. Side view shown.

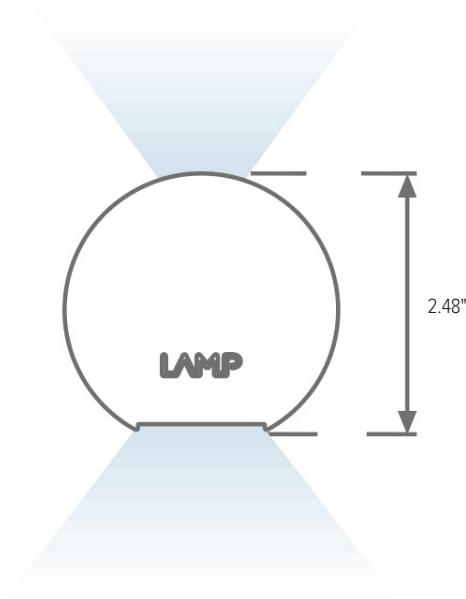


* LED life may vary under actual field conditions due to external factors. Lifetime estimates are generated from actual testing in a controlled environment. Values are conservatively derived from those numbers.

ACCESSORIES

NOTE: Accessories are ordered and shipped separately from luminaire for field installation.
 -XX* indicates a painted accessory. See bottom of page for painted accessory ordering information.



TUB60-XX**
End Cap

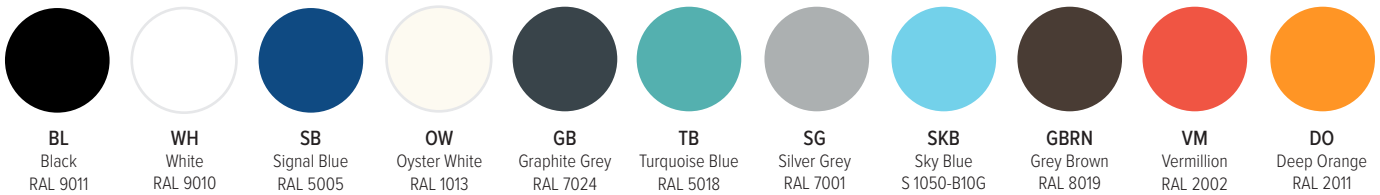

ORDERING INFORMATION

PAINTED ACCESSORIES

MODEL	LOGO	FINISH (*-XX)
TUB60 Tub 60 End Cap (Quantity 1)	LEC End Cap with Lamp Logo	BL Black
	BEC Blank End Cap	WH White
		SB Signal Blue
		OW Oyster White
		GG Graphite Grey
		TB Turquoise Blue
		SG Silver Grey
		SKB Sky Blue
		GBRN Grey Brown
		VM Vermillion
		DO Deep Orange

CUSTOMIZE YOUR EXPERIENCE.

At Experience Brands, we believe every space deserves unique lighting elements. We proudly specialize in crafting solutions that reflect your personal vision. Our expert team is here to collaborate with you to design and implement customized features that elevate your environment.

Ready to Get Started? Email us at: DesignServices@exp-brands.com